

LOCKOUT SYSTEM Assembly Instructions

CONTENTS

Main Unit



3 controllers



Harness




Power






1. Plug one controller into the Moderator slot; controls system enable/disable

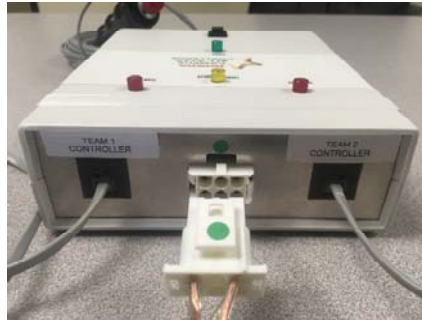

3. Match the green dot on the Harness plug with the green dot on the main unit, plug in

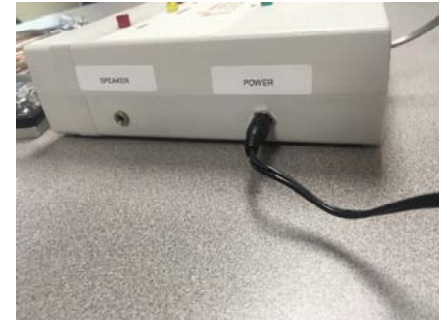

5. Plug the power supply cord into the main unit and the power supply unit into the wall or extension cord.



2. Plug second controller into Team 1 slot; plug third controller into Team 2 slot



4. To release, when finished using, press the two clips and **gently** detach from the main unit.



6. Plug for external Speaker (not provided) if needed for larger venue.

Service: 818-570-3167

TESTING THE LOCKOUT SYSTEM



7. Green light indicates the unit has power; Yellow light indicates the lockout is enabled



8. Team Left Buzzed In



9. Team Right Buzzed In

10. Unfurl the LEDs from the Harness and place on the correct Team table.



When packing for non-use:
Unplug power supply unit and
place in box

Unplug controllers, roll the cords
(as pictured) and place in bag

To release Harness, press the two clips
and **gently** detach from the main unit.
Roll the cord (as pictured), place in bag